

(12) UK Patent Application (19) GB (11) 2 045 321 A

(21) Application No 7923141

(22) Date of filing 3 Jul 1979

(30) Priority data

(31) 79/10766

(32) 28 Mar 1979

(33) United Kingdom (GB)

(43) Application published
29 Oct 1980

(51) INT CL³
E06B 9/02

(52) Domestic classification
E1J GB

(56) Documents cited
None

(58) Field of search
E1J

(71) Applicant
Warwick and Bailey
Limited, Rockcliffe
Works, Paterson Street,
Blackburn, County of
Lancaster

(72) Inventors
Paul Kingsley Dutton,
Barry Smale,
David Alan Alderson,
Raymond Cyril Stott


(74) Agent

J. Owden O'Brien & Son



(64) Security Device for Buildings

(57) A security device for windows
comprises a sheet 1 of a tough

translucent plastics material applied
over the outside of a window frame A,
the sheet being held in position in
contact with the outside of the frame
by bands 5 passing through clips 3 on
the edges of the sheet and tensioned
over rods or bars 6 engaging the
inside of the wall of the building.

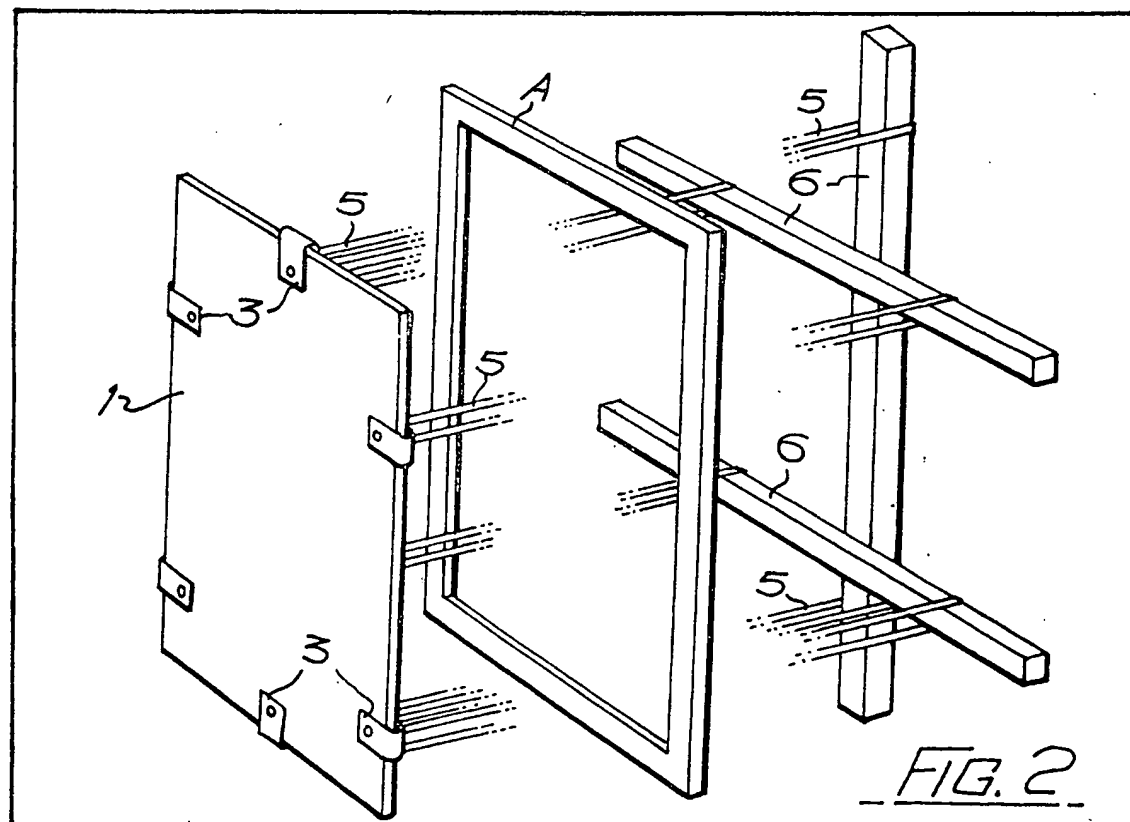

GB2 045 321 A

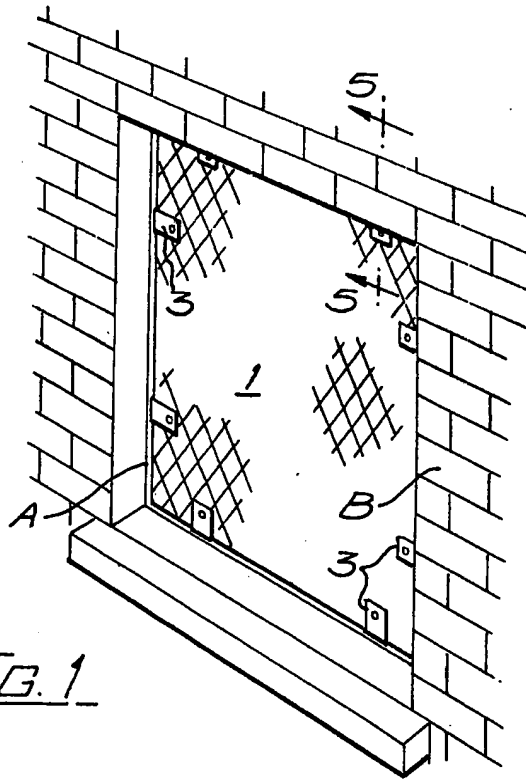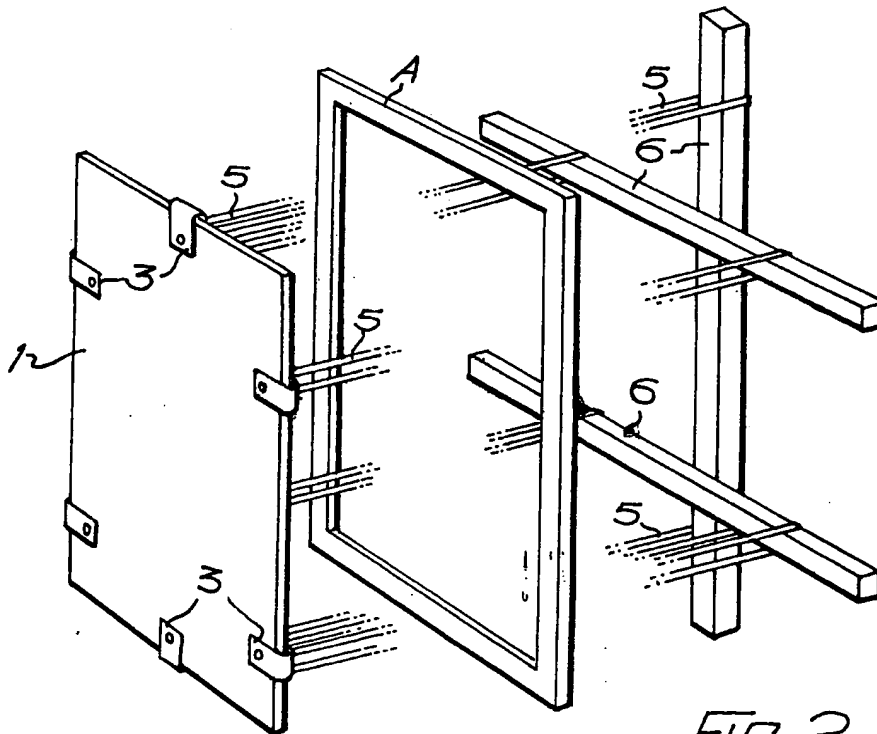FIG. 1FIG. 2

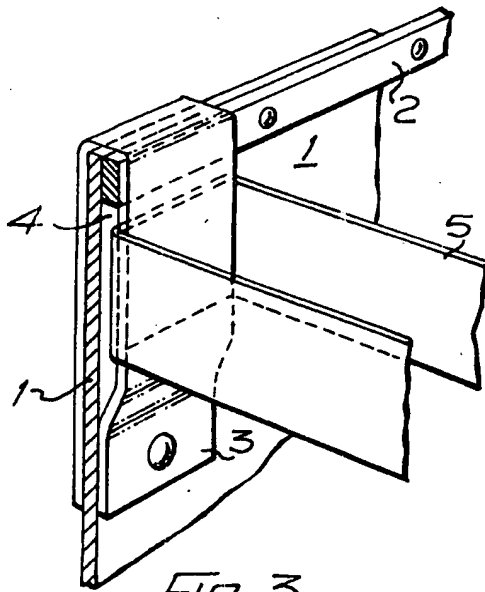


FIG. 3

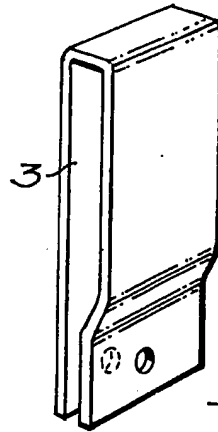


FIG. 4

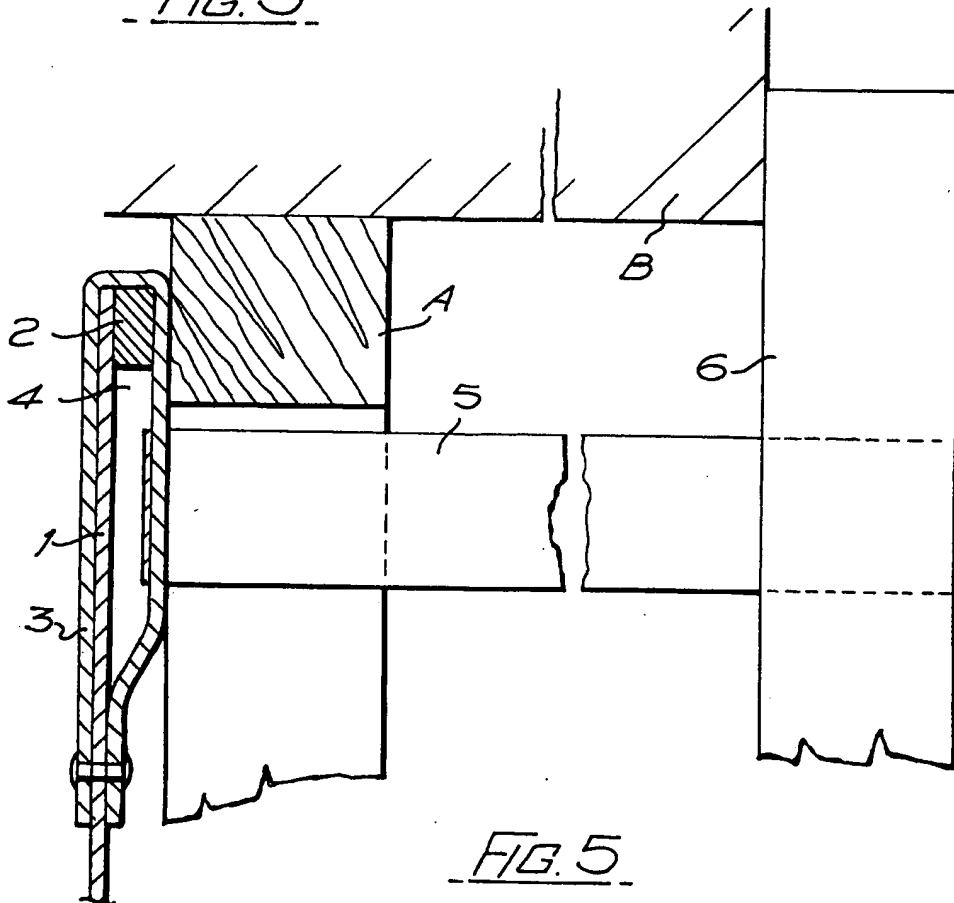


FIG. 5

SPECIFICATION

Improvements in Security Devices for Buildings

5 This invention relates to improvements in security devices for the windows of buildings.

Vacant buildings suffer damage from vandals and the first damage is normally the breaking of windows followed by burglary. Suggestions for protecting windows have been made, the most common being boarding up the window but this has the disadvantage that the window frame is damaged by nailing the boarding to the frames and the blacking out of the interior of the buildings.

15 The object of the invention is to provide means for safeguarding the windows without damage thereto.

According to the invention a security device for the windows of buildings comprises a sheet of a tough plastics material applied over the outside of the window and window frame with substantially U-shaped clips applied at intervals at right angles to the sides and each bolted or riveted to the plastic sheet, a band applied around each clip being tensioned around a rod or bar adapted to bear on the inner side of the wall in which the window frame is mounted to prevent the removal of or damage to the window.

20 The invention will be described with reference to the accompanying drawings:—

Fig. 1 is a perspective view of a window using the protective screen.

Fig. 2 is an exploded perspective view of the window guard;

35 Fig. 3 is an enlarged detail of part of Fig. 2;

Fig. 4 is a perspective view of a clip;

Fig. 5 is a section on 5—5 of Fig. 1.

A sheet of translucent tough reinforced plastics material such as that sold under our Registered Trade Mark Vandalite is applied over the outside of the window frame A as a window guard, a strip of metal 2 (Fig. 3) being applied around the edges of the sheet and affixed thereto on the back

before application to the window.

45 The sheet 1 is affixed to the outside of the window frame A by substantially U-shaped clips 3 extending over the edge of the sheet 1 and strip 2, the two legs of the clips 3 being bolted or riveted together with the sheet 1 sandwiched therebetween. One leg of the clip is bent inwards adjacent one end to leave a slot 4 between the strip and the rivet to receive a metal band 5 extending around the leg of the clip 2 and a rod or bar 6 applied to the wall above and below the opening of window frame A or between the two sides thereof. Means are provided for tensioning the band to secure the sheet in position over the window and frame.

Two or more clips 3 may be applied to each edge of the sheet and the window is protected without substantially darkening the interior of the room.

The protective and safety device has the following advantages: (a) the device is re-usable after removal, (b) no damage to the window frame (c) translucency (d) cannot be dismantled from outside and (e) can be readily dismantled from inside.

Claims

70 1. A security device for the windows or buildings comprising a sheet of a tough translucent plastics material applied over the outside of the window and window frame with substantially U-shaped clips applied at intervals at right angles to the sides and each bolted to the plastics sheet, a band applied around each clip being tensioned around a rod or bar adapted to bear on the inner side of the wall in which the window frame is mounted to prevent the removal of or damage to the window.

80 2. A security device for windows as in Claim 1, in which a reinforcing strip is applied around the edges of the sheet.

3. A security device for the windows of buildings substantially as described with reference to the accompanying drawings.